

Receivers OEM719™



MULTI-FREQUENCY, BACKWARD COMPATIBLE GNSS RECEIVER INCLUDES ALL MODERN SIGNALS

HIGH PRECISION GNSS, BACKWARD COMPATIBLE SIZE

The multi-frequency OEM719 offers future ready precise positioning for space constrained applications. Advanced interference mitigation features maintain high performance in challenging environments. Form factor and pin compatible with NovAtel's popular OEM615™ and OEM617™ receivers, the OEM719 provides the most efficient way to bring powerful Global Navigation Satellite System (GNSS) capable products to market quickly. With centimetre level positioning utilizing TerraStar satellite-delivered correction services, the OEM719 ensures globally available, high performance positioning without the need for expensive network infrastructure. Anywhere. Anytime.


BUILT-IN FLEXIBILITY

The OEM719 uses a 555 channel architecture and can be configured in multiple ways for maximum flexibility. NovAtel's OEM7® firmware provides users with the ability to configure the OEM719 for their unique application needs. The OEM719 is scalable to offer sub-metre to centimetre level positioning, and is field upgradable to all OEM7 family software options. These options include ALIGN® for precise heading and relative positioning, GLIDE® for decimetre level pass-to-pass accuracy and SPAN® GNSS+INS for continuous 3D position, velocity and attitude. NovAtel CORRECT® with RTK delivers centimetre level real-time positioning, or go base-free for centimetre and decimetre PPP solutions using TerraStar corrections.

To learn more about how our firmware solutions can enhance your positioning, please visit novatel.com/products/firmware-options.

DESIGNED WITH THE FUTURE IN MIND

The OEM719 is capable of tracking all current and upcoming GNSS constellations including GPS, GLONASS, Galileo, BeiDou, QZSS and NavIC. It is software upgradable to track upcoming signals as they become available.

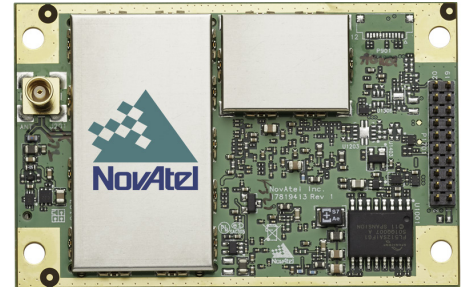

FEATURES

- + 555 channel, all-constellation, multi-frequency positioning solution
- + Multi-channel L-Band supports TerraStar correction services
- + Advanced interference visualization and mitigation features
- + RTK, GLIDE and STEADYLINE® firmware options
- + Simple to integrate, small form factor with 20 g vibration performance rating
- + Compatible with existing OEM615 and OEM617 integrations
- + SPAN GNSS+INS functionality

If you require more information about our receivers, visit novatel.com/oem7

OEM719



PERFORMANCE¹

Channel Count

555 Channels

Signal Tracking

GPS L1 C/A, L1C, L2C, L2P, L5
GLONASS² L1 C/A, L2 C/A, L2P,
L3, L5

Galileo³ E1, E5 AltBOC,
E5a, E5b, E6

BeiDou⁴ B1I, B1C, B2I, B2C, B3I

QZSS L1 C/A, L1C, L2C, L5, L6

NavIC (IRNSS) L5

SBAS L1, L5

L-Band up to 5 channels

Horizontal Position Accuracy (RMS)

Single Point L1 1.5 m

Single Point L1/L2 1.2 m

SBAS⁵ 60 cm

DGPS 40 cm

TerraStar-L⁶ 40 cm

TerraStar-C PRO⁶ 2.5 cm

RTK 1 cm + 1 ppm

Initialization time < 10 s

Initialization reliability > 99.9%

Maximum Data Rate

Measurements up to 100 Hz

Position up to 100 Hz

Time to First Fix

Cold start^{7,8} < 40 s (typical)

Hot start^{9,8} < 19 s (typical)

Signal Reacquisition

L1 < 0.5 s (typical)

L2 < 1.0 s (typical)

Time Accuracy¹⁰ 20 ns RMS

Velocity Accuracy

< 0.03 m/s RMS

Velocity Limit¹¹

515 m/s

PHYSICAL AND ELECTRICAL

Dimensions¹² 46 × 71 × 11 mm

Weight 31 g

Power

Input voltage 3.3 VDC ±5%

Power Consumption¹³

GPS L1 0.9 W (typical)

GPS/GLONASS L1/L2 1.3 W (typical)

All frequencies/All constellations

with L-Band 1.8 W (typical)

Antenna Port Power Output

Output voltage 5.0 VDC ±5%

Maximum current 200 mA

Connectors

Main

20-pin dual row male header

Antenna input

see *RF Connector Variants*

RF CONNECTOR VARIANTS

OEM719 MCX female

OEM719A MCX 90° female

OEM719B MMBX female

COMMUNICATION PORTS

3 LVCMOS up to 460,800 bps

2 CAN Bus 1 Mbps

1 USB 2.0 (device) FS

ENVIRONMENTAL

Temperature

Operating -40°C to +85°C

Storage -55°C to +95°C

Humidity 95% non-condensing

Vibration

Random MIL-STD 810G,

Method 514.7

(Cat 24, 20 g RMS)¹⁴

Sinusoidal IEC 60068-2-6

Bump ISO 9022-31-06 (25 g)

Shock

Operating

MIL-STD-810G (40 g)

Non-operating

MIL-STD-810G,

Method 516.7 (75 g)-Survival

Acceleration

Operating

MIL-STD-810G,

Method 513.7 (16 g)

FEATURES

- Field upgradeable software
- Differential GPS positioning
- Differential correction support for RTCM 2.1, 2.3, 3.0, 3.1, 3.2, 3.3, CMR, CMR+, RTCA and NOVATELX
- Navigation output support for NMEA 0183 and detailed NovAtel ASCII and binary logs
- Receiver Autonomous Integrity Monitoring (RAIM)
- GLIDE and STEADYLINE smoothing algorithms
- Interference Toolkit
- Outputs to drive external LEDs
- 2 Event inputs
- 1 Event output
- Pulse Per Second (PPS) output

FIRMWARE SOLUTIONS

- ALIGN
- SPAN
- RTK
- RTK ASSIST™
- TerraStar PPP
- API

OPTIONAL ACCESSORIES

- VEXXIS® GNSS-500 and GNSS-800 series antennas
- ANT series antennas
- Mechanical mounting rails
- OEM7 Development Kit

For the most recent details of this product: novatel.com/oem7

novatel.com

sales@novatel.com

1-800-NOVATEL (U.S. and Canada) or 403-295-4900

China 0086-21-68882300

Europe 44-1993-848-736

SE Asia and Australia

61-400-883-601

Version 3 Specifications subject to change without notice

©2018 NovAtel Inc. All rights reserved.

NovAtel, OEM7, SPAN, VEXXIS, ALIGN, GLIDE, STEADYLINE and NovAtel CORRECT are registered trademarks of NovAtel Inc.

OEM719, OEM615, OEM617 and RTK ASSIST are trademarks of NovAtel Inc.

Printed in Canada.

D21049 August 2018



¹ Typical values. Performance specifications subject to GNSS system characteristics, Signal-In-Space (SIS) operational degradation, ionospheric and tropospheric conditions, satellite geometry, baseline length, multipath effects and the presence of intentional or unintentional interference sources.

² Hardware ready for L3 and L5.

³ E1bc support only. Hardware ready for E6bc.

⁴ Designed for BeiDou Phase 2 and 3, B1 and B2 compatibility. B3 conditionally supported and subject to change.

⁵ GPS only.

⁶ Requires a subscription to a TerraStar data service. Subscriptions available from NovAtel.

⁷ Typical value. No almanac or ephemerides and no approximate position or time.

⁸ Available in Q2 2019.

⁹ Typical value. Almanac and recent ephemerides saved and approximate position and time entered.

¹⁰ Time accuracy does not include biases due to RF or antenna delay.

¹¹ Export licensing restricts operation to a maximum of 515 metres per second, message output impacted above 500 m/s.

¹² On the OEM719A, the MCX connector extends an additional 2.06 mm (0.081") from the board (71 mm dimension).

¹³ Typical values using serial port communication without interference mitigation. Consult the OEM7 User Documentation for power supply considerations.

¹⁴ Requires mechanical mounting rails to meet 20 g; meets 7.7 g without rails.